



USTM

Professional
water treatment

MultiLine Water softener bypass valve

- Primarily designed for water softener installations
- Saves time during installation
- Shuts off water supply to the device without cutting off water access to the entire building
- Allows water use during installation, repair, or maintenance of the device




The most durable
valve of its kind
on the market (PN 25)



Intuitive
flow control



Horizontal and vertical
installation

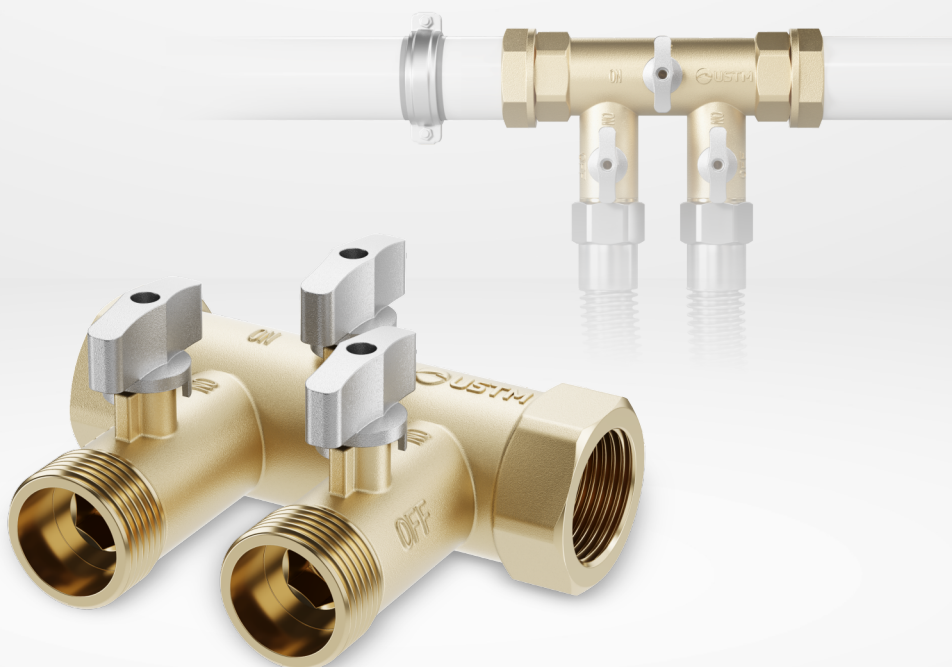



USTM

Professional
water treatment

Technical data

Symbol	BYPASS MULTILINE
Connection diameter	2 x 1" GW i 2 x 1" GZ
Nominal pressure	PN 25
Operating pressure	6 bar
Max. liquid temperature	40 °C
Purpose	Hot and cold water
Material	Brass
Weight	1,2 kg

Dimensions

