



WATER SOFTENER

FUTURA

A modern softener with innovative "up-flow" regeneration. It consumes less energy, water and salt than a standard softener. Simple operation together with high efficiency make it a perfect solution for houses, eateries, hotels or service centers.

This softener has a futuristic design and solid durable construction. It works very quietly and has an intuitive, easy to use LCD display. Thanks to all those features FUTURA is really a user-friendly softener.



SAVINGS-MORE THAN 30%

- futuristic design
- huge savings of operating costs (more than 30% of salt and water)
- extended lifetime of resin
- reduced waste water volume
- up-flow regeneration
- user-friendly display LCD (English menu)











TECHNICAL DATA

Catalogue No.	WS-25-C-85SE
Туре	Futura - compact
Maximum flow	2,3 m³/h
Nominal flow	1,6 m³/h
Resin volume	25
Exchange capacity	71° dH x m³
Average water consumption for regeneration	140
Average salt consumption for regeneration	1,8 kg
Dimensions (W/D/H)	30 / 52 / 111 cm
Tank dimensions (OD/H)	10" / 35"
Weight	33,5 kg
Working pressure	3 – 5,5 bar
Working temperature	4 – 30 (°C)
Power supply, voltage	AC 220 - 240 V; 12 V (650 mA)
Power consumption	5 W (during regeneration mode only)
Connection	I"

^{*} depends on water hardness










CONNECTION SCHEME

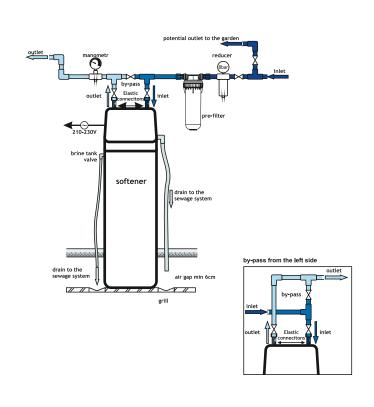

remember

In order to protect the softener against water contamination from the water pipe, we recommend to install a pre-filter WFW EMI with meltblown PS or yarn PP cartridge.

Filter housings WFW EMI are equipped with pressure release button and brass inserts. We offer them with mounting plate and wrench in a three connection sizes: 1/2", 3/4", 1".



